
## 単相複巻変圧器

# WT-H種 (受注生産)





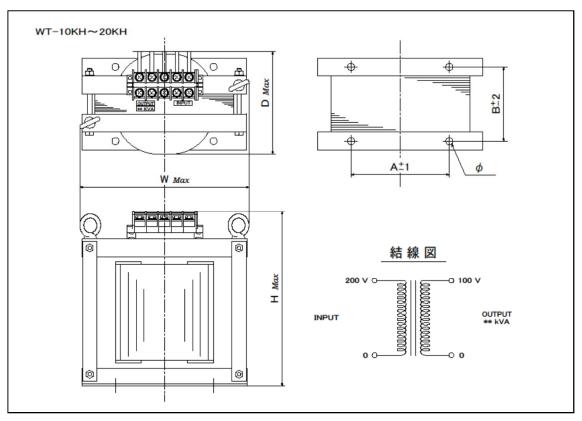

#### H種絶縁 概略寸法表

単位 mm

						<b>一一一一</b>				
型 名	容量	入力電圧/出力電圧	W	D	Η	Α	B±2	φ	質量 kg	
WT-5KH	5 kVA		268	240	290	180	150	12 × 20	47	
WT-6KH	6 kVA		268	260	290	180	170	12 × 20	54	
WT-7.5KH	7.5 kVA	200/100 V	268	280	295	180	190	12 × 20	63	
WT-10KH	10 kVA		360	240	375	240	150	13	85	
WT-15KH	15 kVA		360	290	395	240	200	13	120	
WT-20KH	20 kVA		360	340	435	240	230	13	161	
WT-25KH	25 kVA	400/200 V	430	370	495	250	280	14	190	
WT-30KH	30 kVA		430	370	525	250	280	14	213	
WT-40KH	40 kVA		470	390	600	300	290	16	275	
WT-50KH	50 kVA		490	410	630	300	310	16	327	

## 単相複巻ケース入変圧器

### WTC-H種

(受注生産)



WTC-5KH~20KH



WTC-5KH:ブレーカーは特別注文



WTC-10KH: キャスターは特別注文

**H種絶縁** 標準電圧:200 V/100 V 又は 400 V/200 V

概略寸法表 塗装色:マンセル 5Y7/1

単位 mm

型名	容量	W	D	Н	Е	I	С	Α	B±2	φ	質量 kg	図
WTC-5KH	5 kVA	305	430	320	40	45	/	265	300	11	58	1
WTC-7.5KH	7.5 kVA	305	430	320	40	45	/	265	300	11	73	1
WTC-10KH	10 kVA	355	480	450	50	45	/	310	300	13	108	1
WTC-15KH	15 kVA	405	480	530	50	55	/	360	350	13	161	1
WTC-20KH	20 kVA	405	480	530	50	55	/	360	350	13	184	1
WTC-25KH	25 kVA	455	600	600	75	55	/	300	565	14	220	2
WTC-30KH	30 kVA	455	600	700	75	55	/	300	565	14	248	2
WTC-40KH	40 kVA	455	650	750	75	65	/	300	615	14	310	2
WTC-50KH	50 kVA	455	650	800	75	65	/	300	615	14	382	2



