

単相複巻ケース入変圧器

WTC-

(受注生産)



WTC-300~WTC-4K



WTC-5K



WTC-5K: プレーカーは特別注文



WTC-10K: キャスターは特別注文

B種絶縁
概略寸法表

標準電圧 : 200 V / 100 V 又は 400 V / 200 V
塗装色 : マンセル 5Y7/1

単位 mm

型名	容量	W	D	H	E	I	C	A	B±2	φ	質量 kg	図
WTC-300	300 VA	190	200	180	20	/	150	170	130	7	7	1
WTC-500	500 VA	220	220	200	20	/	180	200	150	7	12	1
WTC-750	750 VA	220	220	200	20	/	180	200	150	7	14	1
WTC-1K	1 kVA	220	220	200	20	/	180	200	150	7	17	1
WTC-1.5K	1.5 kVA	270	260	200	20	/	220	245	180	9	22	1
WTC-2K	2 kVA	310	280	250	20	/	250	280	200	11	30	1
WTC-2.5K	2.5 kVA	310	280	250	20	/	250	280	200	11	35	1
WTC-3K	3 kVA	330	330	300	20	/	270	300	200	11	42	1
WTC-4K	4 kVA	330	330	300	20	/	270	300	200	11	50	1
WTC-5K	5 kVA	305	430	320	40	45	/	265	300	11	65	2
WTC-7.5K	7.5 kVA	355	480	450	50	45	/	310	300	13	105	2
WTC-10K	10 kVA	355	480	450	50	45	/	310	300	13	128	2
WTC-15K	15 kVA	405	480	530	50	55	/	360	350	13	173	2
WTC-20K	20 kVA	405	600	600	50	55	/	360	400	14	209	2
WTC-25K	25 kVA	455	600	750	75	55	/	300	565	14	260	3
WTC-30K	30 kVA	455	650	800	75	65	/	300	615	14	320	3
WTC-40K	40 kVA	555	650	770	75	65	/	350	615	14	400	3
WTC-50K	50 kVA	605	750	770	75	65	/	400	715	14	470	3

図 1

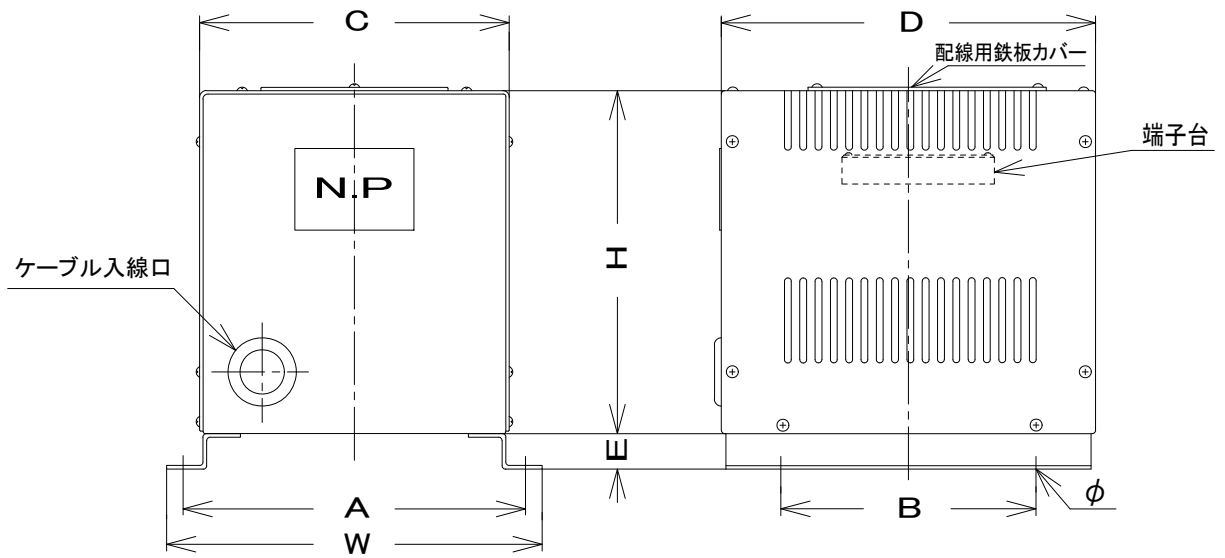


図 2

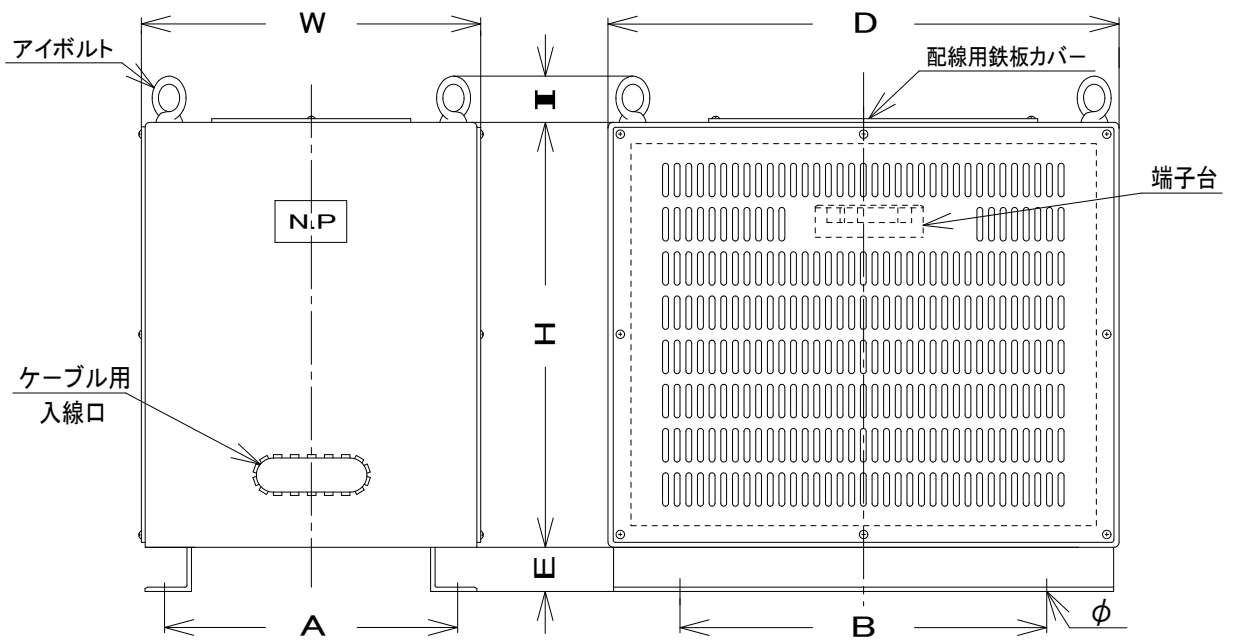


図 3

